


Base Manifold with Pressure Relief Valve for ISO 4401-03 (05) Valves


DP6

Size 06, 10 (D03, D05) • Q_{max} 50, 120 l/min (13, 32 GPM) • p_{max} 350 bar (5100 PSI)

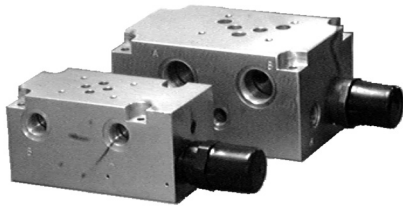

DP6-06-*-VPP1T*


ISO 4401-03-02-0-05 (CETOP 03)

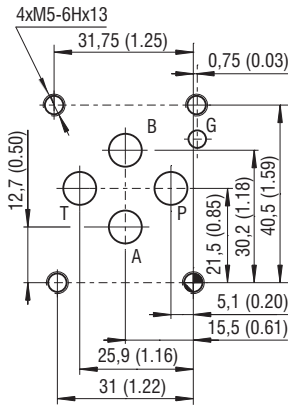

Ports P, A, B, T - max Ø 7.5 mm (0.29 in)

DP6-10-*-VPP1T*

ISO 4401-05-04-0-05 (CETOP 05)

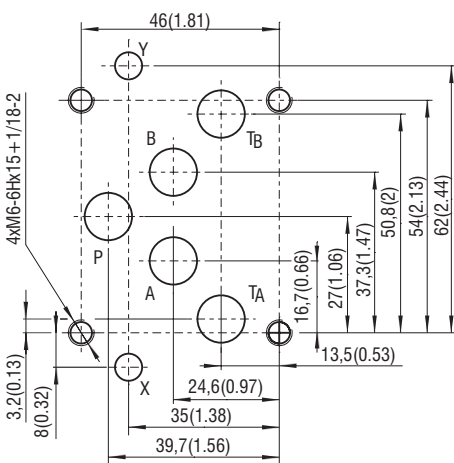

Ports P, A, B, T - max Ø 11.2 mm (0.44 in)

Technical Features


- › Base manifolds used for hydraulic systems or power units which require only one directional valve assembly
- › Designed for two sizes of flange mounted valves with mounting interface acc. to ISO 4401-03 (CETOP 03) or ISO 4401-05 (CETOP 05)
- › Integrated direct operated pressure relief valve up to 120 l/min (13.32 GPM)
- › Suitable for horizontal mounting on the tank cover of the pump drive unit, or for vertical arrangement with the pump situated in the tank under the oil level
- › Wide pressure range up to 320 bar for both sizes of pressure relief valves
- › In the standard version, the plate is zinc-coated for 240 h protection acc. to ISO 9227 and the pressure valve is black-oxide coated

Technical Data

Valve size		06 (D03)	10 (D05)
Max. operating pressure (steel)		bar (PSI) 350 (5080)	
Max. flow rate		l/min (GPM) 50 (13)	120 (32)
Mass with valve	DP6-06*	kg (lbs) 4.1 (9.0)	
	DP6-10*	7.7 (17.0)	

	Data Sheet	Type
General information	GL_0060	Products and operating conditions
Mounting interface / tolerances	SMT_0019	Size 06, 10 / CETOP 03, 05
Spare parts	SP_8010	

Ordering Code

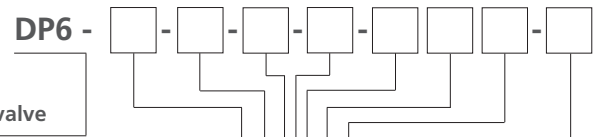

Base manifold for ISO 4401 modular valve

Size, mounting interface acc. to:
 ISO 4401-03-02-0-05, DIN 24340 (CETOP 03) **06**
 ISO 4401-05-04-0-05, DIN 24340 (CETOP 05) **10**

Pressure relief valve cavity
 M28x1.5 / QP2 **QP2**
 M35x1.5 / QT2 **QT2**

Port size
 P, T, A, B ... G 3/8, M ... G 1/4* **G1**
 P, T, A, B ... G 3/4, M ... G 1/4** **G2**
 P, T, A, B ... SAE-6, M ... SAE-4* **S1**
 *Only for size 06
 **Only for size 10

Pressure relief mode
 without pressure relief valve **No designation**
 VPP1-06, 10 **VPP1**
 VPP2-06 **VPP2**

Adjustment option
 allen key (hex. 6) with protective cap **T**
 hand knob, plastic **RP**


Surface treatment
No designation
 plate zinc-coated (ZnCr-3),
 ISO 9227 (240h),
 the pressure valve
 is black-oxide coated

Seals
No designation **NBR**
N Without seal rings


Pressure range
2.5 up to 25 bar (360 PSI)
6.3 up to 63 bar (910 PSI)
10 up to 100 bar (1450 PSI)
16 up to 160 bar (2320 PSI)
25 up to 250 bar (3630 PSI)
32 up to 320 bar (4640 PSI)

Adjustment Options dimensions in millimeters (inches)

DP6-06-*-VPP1T*
 Model T






DP6-06-*-VPP1RP*
 Model RP


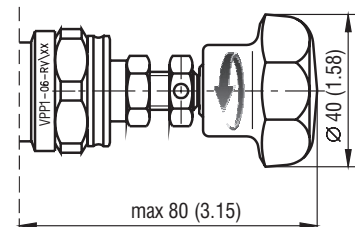


Dimensions in millimeters (inches)

DP6-06-*-VPP1T*


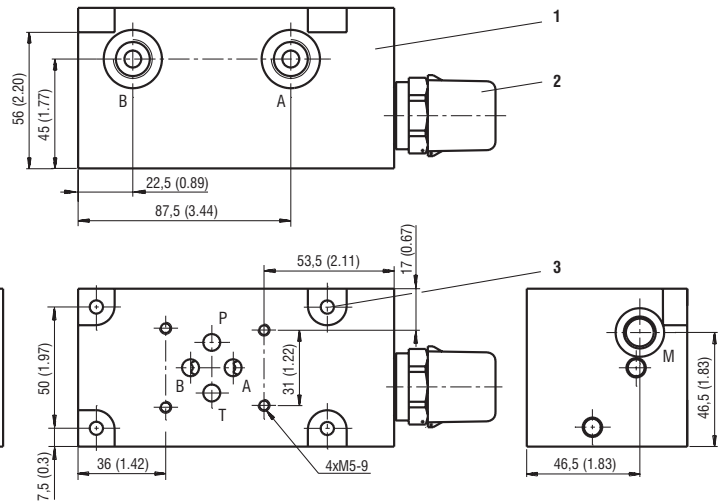




Port	Thread	Counterbore	Counterbore depth
A	G3/8, SAE-6	Ø 24 (0.94)	1 (0.04)
B	G3/8, SAE-6	Ø 24 (0.94)	1 (0.04)
P	G3/8, SAE-6	Ø 24 (0.94)	1 (0.04)
T	G3/8, SAE-6	Ø 24 (0.94)	1 (0.04)
P1	G3/8, SAE-6	Ø 28 (1.1)	5.5 (0.22)
T1	G3/8, SAE-6	Ø 28 (1.1)	5.5 (0.22)
M	G1/4, SAE-4	Ø 20 (0.79)	1 (0.04)

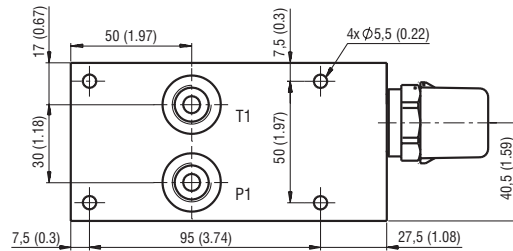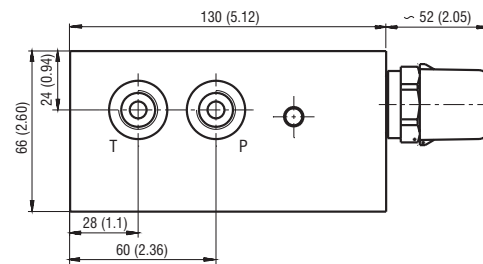


- 1 Base block
- 2 Pressure relief valve
- 3 4 mounting holes

DP6-10-*-VPP1T*

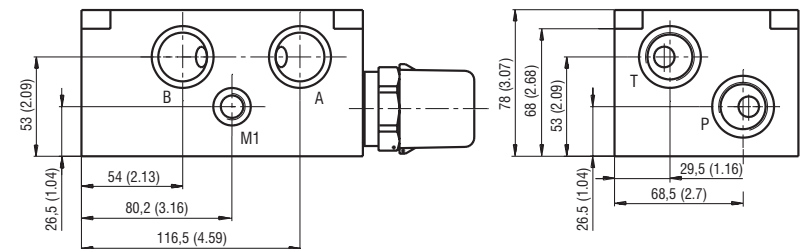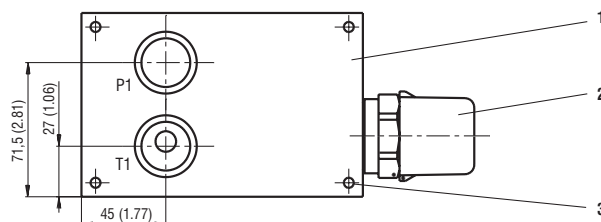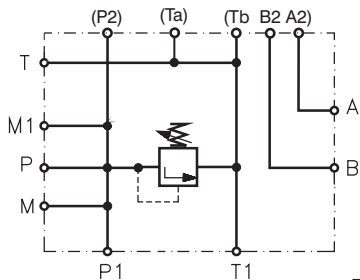

Port	Thread	Counterbore	Counterbore depth
A	G3/4	Ø 33 (1.3)	1 (0.04)
B	G3/4	Ø 33 (1.3)	1 (0.04)
P	G3/4	Ø 33 (1.3)	1 (0.04)
T	G3/4	Ø 33 (1.3)	1 (0.04)
P1	G3/4	Ø 38 (1.5)	5.5 (0.22)
T1	G3/4	Ø 38 (1.5)	5.5 (0.22)
M	G1/4	Ø 20 (0.79)	1 (0.04)
M1	G1/4	Ø 20 (0.79)	1 (0.04)

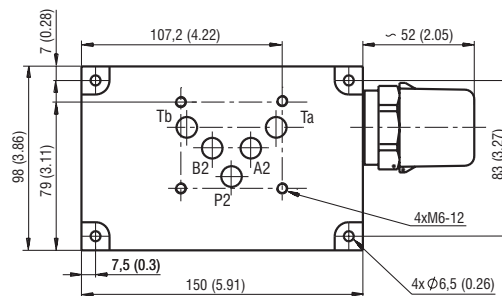

- 1 Base block
- 2 Pressure relief valve
- 3 4 mounting holes