


High Pressure Filters - Worldline 300
HD 319 · HD 419 · HD 619

In-line mounting · Operating pressure up to 630 bar / 9137 psi · Nominal flow rate up to 450 l/min / 118.9 gpm

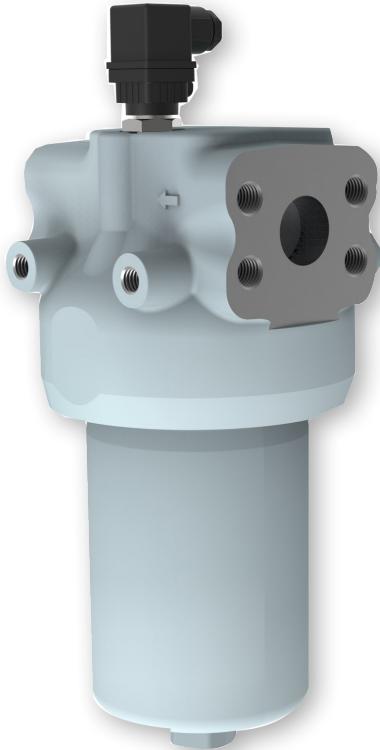

High Pressure Filter HD 319

Description
Application

In the high pressure circuits of hydraulic systems.

Performance features

Protection against wear:

By means of filter elements that even in full-flow filtration meet the highest demands regarding cleanliness classes.

Protection against malfunction:

 Through installation near to the control valves or other expensive components. The specific determined flow rate guarantees a closed by-pass valve even at $v \leq 200 \text{ mm}^2/\text{s}$ / 927 SUS (cold start condition).

Filter elements

Flow direction from outside to center.

The star-shaped pleating of the filter material results in:

- › large filter surfaces
- › low pressure drop
- › high dirt-holding capacities
- › long service life

Filter maintenance

By using a clogging indicator the correct moment for maintenance is stated and guarantees the optimum utilization of the filter life.

Materials

Filter head: Spheroidal graphite cast iron (SGI)

Cold extruded steel

Powder paint

NBR (FPM on request)

Filter media: EXAPOR®MAX 3 - inorganic multi-layer microfiber web

Accessories


Electrical and / or optical clogging indicators are available on request. Dimensions and technical data see catalog sheet 60.40.

Operating pressure

0 ... 360 bar / 5220 psi, min. 2×10^6 pressure cycles
Nominal pressure according to DIN 24550

0 ... 630 bar / 9137 psi, min. 10^4 pressure cycles
Quasi-static operating pressure

Permissible pressures for other numbers of cycles

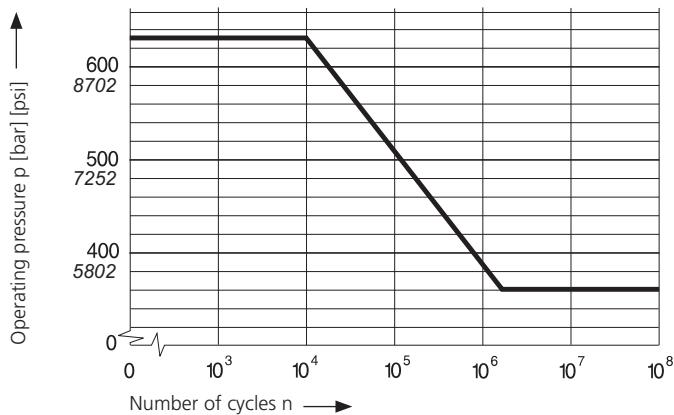

Nominal flow rate

Up to 450 l/min / 118.9 gpm (see Selection Charts, column 2).
The nominal flow rates indicated by ARGO-HYTOS are based on the following features:

- › closed by-pass valve at $v \leq 200 \text{ mm}^2/\text{s}$ / 927 SUS
- › element service life > 1000 operating hours at an average fluid contamination of 0.07 g per l/min / 0.27 g per gpm flow volume
- › flow velocity in the connection lines:
up to 250 bar $\leq 8 \text{ m/s}$ / up to 3626 psi $\leq 26.3 \text{ ft/s}$
 $> 250 \text{ bar} \quad \leq 12 \text{ m/s} / > 3626 \text{ psi} \quad \leq 39.4 \text{ ft/s}$

Filter fineness

5 $\mu\text{m}(\text{c})$... 16 $\mu\text{m}(\text{c})$
 β -values according to ISO 16889
(see Selection Charts, column 4 and diagram Dx).

Dirt-holding capacity

Values in g test dust ISO MTD according to ISO 16889
(see Selection Charts, column 5).

Hydraulic fluids

Mineral oil and biodegradable fluids
(HEES and HETG, see info-sheet 00.20).

Temperature range

-30 °C ... +100 °C (temporary -40 °C ... +120 °C)
-22 °F ... +212 °F (temporary -40 °F ... +248 °F)

Viscosity at nominal flow rate

- › at operating temperature: $v < 60 \text{ mm}^2/\text{s}$ / 280 SUS
- › as starting viscosity: $v_{\text{max}} = 1200 \text{ mm}^2/\text{s}$ / 5560 SUS
- › at initial operation:

The recommended starting viscosity can be read from the diagram D (pressure drop as a function of the kinematic viscosity) as follows: Find the 70% Δp of the cracking pressure of the by-pass valve on the vertical axis. Draw a horizontal line so that it intersects the Δp curve at a point. Read this point on the horizontal axis for the viscosity.

Mounting position

Preferably vertical, filter head on top.

Connection

Threaded ports according to

- › ISO 228 or DIN 13
- › SAE standard J514
- › SAE-flange (6000 psi)


Sizes see Order Information and Selection Charts, column 6 as well as ordering example (other connections on request).

For installation recommendations, see info sheet 00.325.


Diagrams

Δp-curves for complete filters in Selection Charts, column 3


D1 Pressure drop as a function of the **flow volume**
at $v = 35 \text{ mm}^2/\text{s} / 162 \text{ SUS}$ (0 = casing empty)

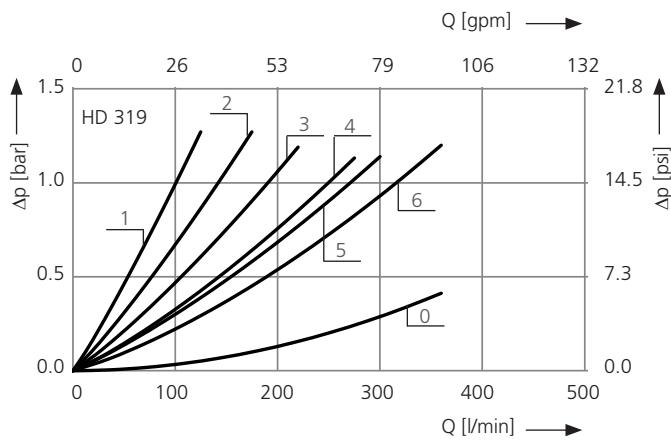


Pressure drop as a function of the
kinematic viscosity at nominal flow

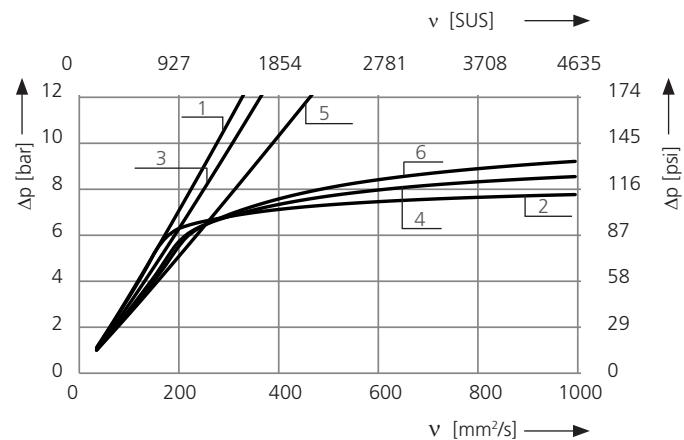


D2 Pressure drop as a function of the **flow volume**
at $v = 35 \text{ mm}^2/\text{s} / 162 \text{ SUS}$ (0 = casing empty)

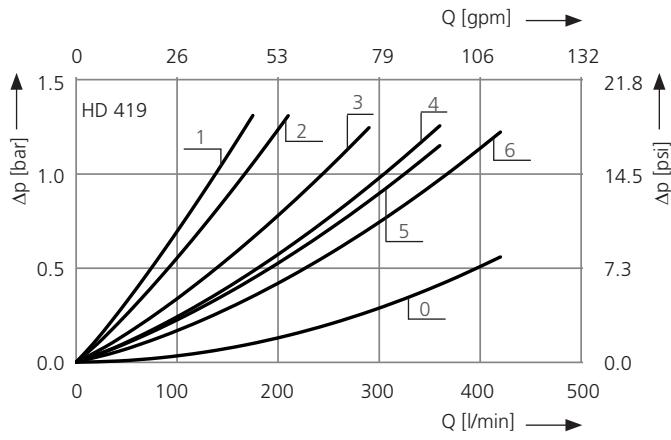


Pressure drop as a function of the
kinematic viscosity at nominal flow

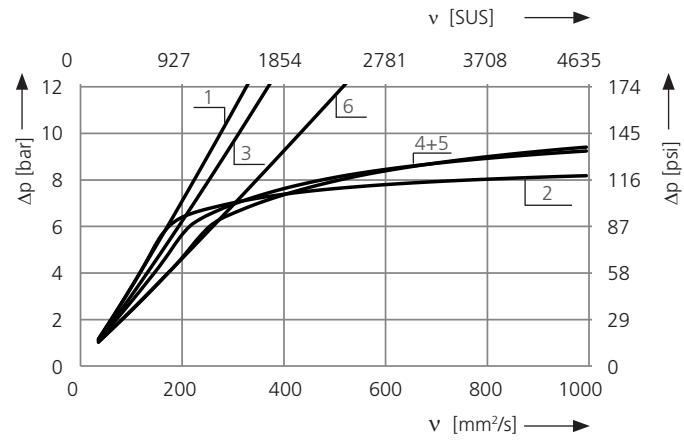

D3 Pressure drop as a function of the **flow volume**
at $v = 35 \text{ mm}^2/\text{s} / 162 \text{ SUS}$ (0 = casing empty)

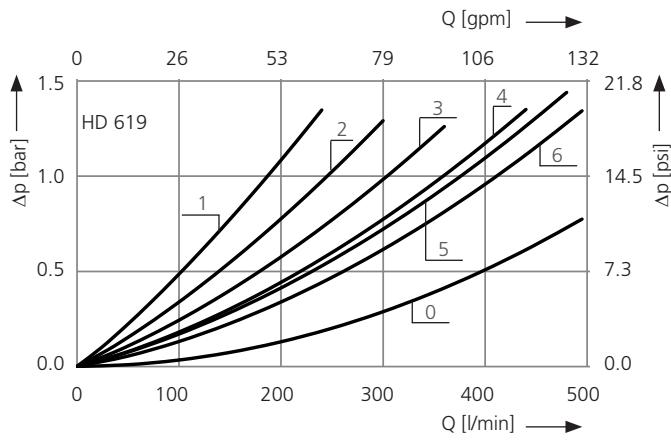


Pressure drop as a function of the
kinematic viscosity at nominal flow

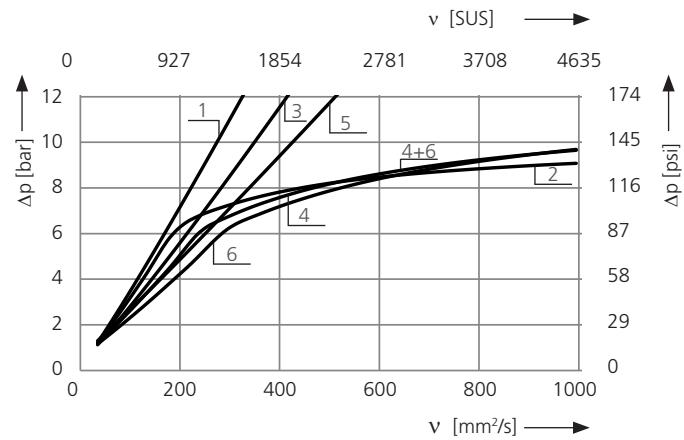

Filter fineness curves in Selection Charts, column 4

Dx Filtration ratio β as a function of particle size x obtained by the Multi-Pass Test according to ISO 16889

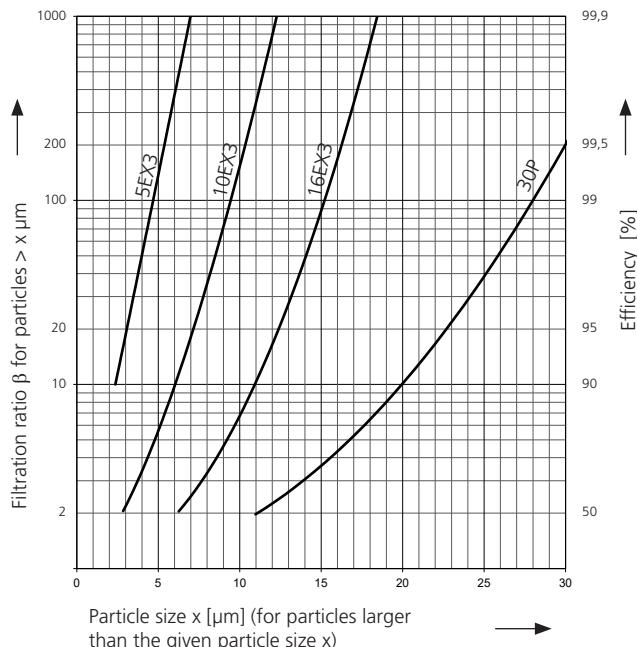

The abbreviations represent the following β -values resp. finenesses:

For EXAPOR®MAX 3 and Paper elements:

5EX3 =	$\bar{\beta}_{5(c)}$ = 200	EXAPOR®MAX 3
10EX3 =	$\bar{\beta}_{10(c)}$ = 200	EXAPOR®MAX 3
16EX3 =	$\bar{\beta}_{16(c)}$ = 200	EXAPOR®MAX 3
30P =	$\bar{\beta}_{30(c)}$ = 200	Paper

Based on the structure of the filter media of the 30P paper elements, deviations from the printed curves are quite probable.

For screen elements:

40S =	screen material with mesh size	40 μm
60S =	screen material with mesh size	60 μm
100S =	screen material with mesh size	100 μm

Tolerances for mesh size according to DIN 4189

For special applications, finenesses differing from these curves are also available by using special composed filter media.

Order Information

Two different head pieces with four various connecting options are available.

Order example: The filter HD 319-265 has to be supplied with SAE 1 1/4 flanged connection (with metric fastening threads) and with an optical clogging indicator with automatic reset.

Order description:

HD 319-165 OD1

Connections:

4 options are available

Flanged connection (A/B) SAE 1 1/4 (6000 psi)¹ _____ 1

Threaded port (A/B) G1 1/2 resp. G1 1/2² _____ 2

Flanged connection (A/B) SAE 1 1/4 (6000 psi)³ _____ 3

Threaded port (A/B) -20 SAE resp. -24 SAE⁴ _____ 7

Clogging indicator (code)

For the appropriate clogging indicator see catalog sheet 60.40. The desired clogging indicator model is indicated by the code (Selection Charts, column 2).

¹ With metric fastening threads

² G1 1/2 from size HD 619 upwards

³ With UNC fastening threads

⁴ -24 SAE (1 7/8-12 UN-2B) from size HD 619 upwards

Selection Chart 1 of 2

Part No. ¹	l/min	Nominal flow rate	Pressure drop see diagram D / curve no.	Filter fineness see diagr. Dx	Dirt-holding capacity	Connection A/B	Cracking pressure of by-pass	Symbol	Replacement filter element	Weight	Clogging indicator	Cracking pressure in ()	Remarks / contact type of clogging indicator
1	2	3	4	5	6	7	8	9	10	11			12
HD 319-289 ED8	110	D1/1	5EX3	22	G1½	-	4	V3.0817-13 ³	16.3	electrical (5)	change-over		
HD 319-269	155	D1/2	5EX3	36	G1½	7	1	V3.0817-03	15.9	- ⁴	-		
HD 319-286 ED8	195	D1/3	10EX3	24	G1½	-	4	V3.0817-16 ³	16.3	electrical (5)	change-over		
HD 319-265²	250	D1/4	10EX3	37	G1½	7	1	V3.0817-06	15.9	- ⁴	-		
HD 319-288 ED8	270	D1/5	16EX3	25	G1½	-	4	V3.0817-18 ³	16.3	electrical (5)	change-over		
HD 319-267²	330	D1/6	16EX3	38	G1½	7	1	V3.0817-08	15.9	- ⁴	-		
HD 419-289 ED8	155	D2/1	5EX3	31	G1½	-	4	V3.0823-13 ³	17.8	electrical (5)	change-over		
HD 419-269	190	D2/2	5EX3	50	G1½	7	1	V3.0823-03	17.2	- ⁴	-		
HD 419-286 ED8	265	D2/3	10EX3	34	G1½	-	4	V3.0823-16 ³	17.8	electrical (5)	change-over		
HD 419-266²	330	D2/4	10EX3	52	G1½	7	1	V3.0823-06	17.2	- ⁴	-		
HD 419-288 ED8	330	D2/5	16EX3	35	G1½	-	4	V3.0823-18 ³	17.8	electrical (5)	change-over		
HD 419-268²	380	D2/6	16EX3	53	G1½	7	1	V3.0823-08	17.2	- ⁴	-		
HD 619-289 ED8	220	D3/1	5EX3	45	G1½	-	4	V3.0833-13 ³	20.6	electrical (5)	change-over		
HD 619-269	280	D3/2	5EX3	74	G1½	7	1	V3.0833-03	19.9	- ⁴	-		
HD 619-286 ED8	330	D3/3	10EX3	50	G1½	-	4	V3.0833-16 ³	20.6	electrical (5)	change-over		
HD 619-266²	400	D3/4	10EX3	75	G1½	7	1	V3.0833-06	19.9	- ⁴	-		
HD 619-288 ED8	450	D3/5	16EX3	51	G1½	-	4	V3.0833-18 ³	20.6	electrical (5)	change-over		
HD 619-268²	450	D3/6	16EX3	76	G1½	7	1	V3.0833-08	19.9	- ⁴	-		

¹ For additional options please see section "Order Information"

² Preferred type, no minimum order quantity required

³ Element differential pressure stable up to 160 bar, clogging indicator required

⁴ The mounting hole for clogging indicators is available at all filters, i.e. all clogging indicators from catalog sheet 60.40 can also be retrofitted.

Optical or electrical clogging indicators can be provided for clogging monitoring. When ordering filters with integrated monitoring, the clogging indicator code must be added to the order number of the desired filter variant (basic unit) (to be found in catalog sheet 60.40, column 2)

For the appropriate clogging indicator see catalog sheet 60.40.

Oder example: see "Order Information".

Remarks:

- › The switching pressure of the clogging indicator has always to be lower than the cracking pressure of the by-pass valve (see Selection Chart, column 7).
- › For versions with electrical clogging indicator, the device socket is not included in the scope of delivery.
- › For the electrical clogging indicator of type ED8, a transparent socket with two LEDs is available, which additionally enables visual indication of the filter contamination (order no. DG 041.1200).
- › The filters listed in this chart are standard filters. Other designs available on request.

Selection Chart 2 of 2

Part No. ¹	Nominal flow rate		Pressure drop see diagram D /curve no.		Filter fineness see diag. Dx		Dirt-holding capacity		Connection A/B		Cracking pressure of by-pass		Symbol		Replacement filter element		Weight		Clogging indicator		Cracking pressure in ()		Remarks / contact type of clogging indicator		
	gpm			g		psi			lbs		psi														
1	2	3	4	5	6	7	8	9	10	11	12														
HD 319-789 ED8	29.1	D1/1	5EX3	22	-20 ⁴	-	4	V3.0817-13 ³	35.9	electrical	(73)	change-over													
HD 319-769	40.9	D1/2	5EX3	36	-20 ⁴	102	1	V3.0817-03	35.1	- ⁶		-													
HD 319-786 ED8	51.5	D1/3	10EX3	24	-20 ⁴	-	4	V3.0817-16 ³	35.9	electrical	(73)	change-over													
HD 319-766²	66.0	D1/4	10EX3	37	-20 ⁴	102	1	V3.0817-06	35.1	- ⁶		-													
HD 319-788 ED8	71.3	D1/5	16EX3	25	-20 ⁴	-	4	V3.0817-18 ³	35.9	electrical	(73)	change-over													
HD 319-768²	87.2	D1/6	16EX3	38	-20 ⁴	102	1	V3.0817-08	35.1	- ⁶		-													
HD 419-789 ED8	40.9	D2/1	5EX3	31	-20 ⁴	-	4	V3.0823-13 ³	39.2	electrical	(73)	change-over													
HD 419-769	50.2	D2/2	5EX3	50	-20 ⁴	102	1	V3.0823-03	37.9	- ⁶		-													
HD 419-786 ED8	70.0	D2/3	10EX3	34	-20 ⁴	-	4	V3.0823-16 ³	39.2	electrical	(73)	change-over													
HD 419-766²	87.2	D2/4	10EX3	52	-20 ⁴	102	1	V3.0823-06	37.9	- ⁶		-													
HD 419-788 ED8	87.2	D2/5	16EX3	35	-20 ⁴	-	4	V3.0823-18 ³	39.2	electrical	(73)	change-over													
HD 419-768²	100.4	D2/6	16EX3	53	-20 ⁴	102	1	V3.0823-08	37.9	- ⁶		-													
HD 619-789 ED8	58.1	D3/1	5EX3	45	-24 ⁵	-	4	V3.0833-13 ³	45.4	electrical	(73)	change-over													
HD 619-769	73.9	D3/2	5EX3	74	-24 ⁵	102	1	V3.0833-03	43.9	- ⁶		-													
HD 619-786 ED8	87.2	D3/3	10EX3	50	-24 ⁵	-	4	V3.0833-16 ³	45.4	electrical	(73)	change-over													
HD 619-766²	105.6	D3/4	10EX3	75	-24 ⁵	102	1	V3.0833-06	43.9	- ⁶		-													
HD 619-788 ED8	118.9	D3/5	16EX3	51	-24 ⁵	-	4	V3.0833-18 ³	45.4	electrical	(73)	change-over													
HD 619-768²	118.9	D3/6	16EX3	76	-24 ⁵	102	1	V3.0833-08	43.9	- ⁶		-													

¹ For additional options please see section "Order Information"

² Preferred type, no minimum order quantity required

³ Element differential pressure stable up to 2320 psi, clogging indicator required

⁴ Corresponds to 1^{5/8}-12 UN-2B

⁵ Corresponds to 1^{7/8}-12 UN-2B

⁶ The mounting hole for clogging indicators is available at all filters, i.e. all clogging indicators from catalog sheet 60.40 can also be retrofitted.

Optical or electrical clogging indicators can be provided for clogging monitoring. When ordering filters with integrated monitoring, the clogging indicator code must be added to the order number of the desired filter variant (basic unit) (to be found in catalog sheet 60.40, column 2)

For the appropriate clogging indicator see catalog sheet 60.40.


Oder example: see "Order Information".

Remarks:


- › The switching pressure of the clogging indicator has always to be lower than the cracking pressure of the by-pass valve (see Selection Chart, column 7).
- › For versions with electrical clogging indicator, the device socket is not included in the scope of delivery.
- › For the electrical clogging indicator of type ED8, a transparent socket with two LEDs is available, which additionally enables visual indication of the filter contamination (order no. DG 041.1200).
- › The filters listed in this chart are standard filters. Other designs available on request.

Dimensions


Threaded connection

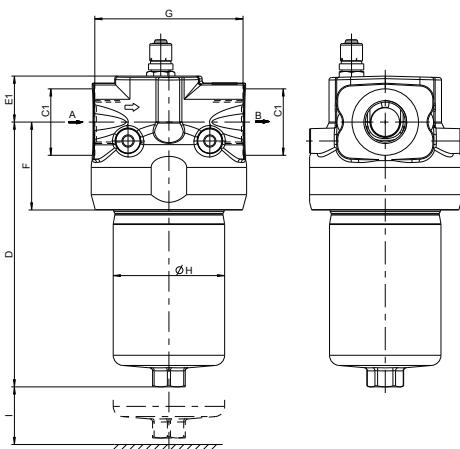


Flanged connection

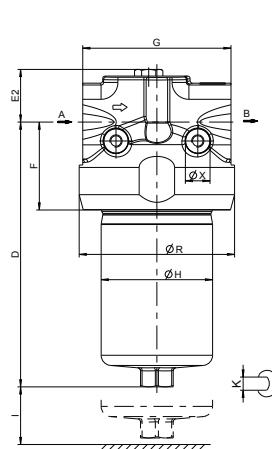

Version with integrated optical clogging indicator OD1

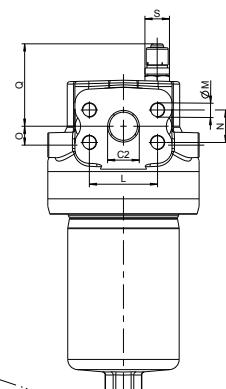


Version with integrated electrical clogging indicator ED8 and connector socket¹



¹ not included in scope of delivery



Terminal connection ED8

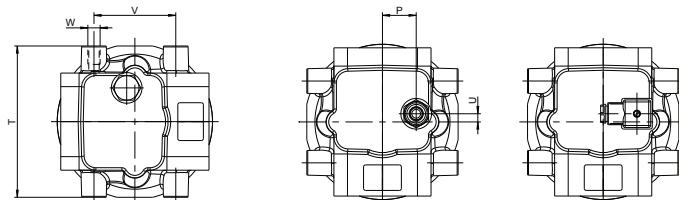

Measurements in mm

Type	A/B	C ₁	C ₂	D	E ₁	E ₂	F	G	H	I	K	L	M Ø / depth	N
HD 319	see	65	31	259	45	52	86	145	109	55	AF 32	66,7	M14 / 22	31.8
HD 419	Selection	65	31	323	45	52	86	145	109	55	AF 32	66,7	M14 / 22	31.8
HD 619	Chart	65	31	424	45	52	86	145	109	55	AF 32	66,7	M14 / 22	31.8

Type	O	P	Q	R	S	T	U	V	W Ø / depth	X	Y	Z		
HD 319	18.5	33	81	152	AF 24	148	8	80	M12 / 18	24	□ 30	100		
HD 419	18.5	33	81	152	AF 24	148	8	80	M12 / 18	24	□ 30	100		
HD 619	18.5	33	81	152	AF 24	148	8	80	M12 / 18	24	□ 30	100		

Measurements in inch


Type	A/B	C ₁	C ₂	D	E ₁	E ₂	F	G	H	I	K mm	L	M Ø / depth	N
HD 319	see	2.56	1.22	10.20	1.77	2.05	3.39	5.71	4.29	2.17	AF 32	2.63	²	1.25
HD 419	Selection	2.56	1.22	12.72	1.77	2.05	3.39	5.71	4.29	2.17	AF 32	2.63	²	1.25
HD 619	Chart	2.56	1.22	16.69	1.77	2.05	3.39	5.71	4.19	2.17	AF 32	2.63	²	1.25

Type	O	P	Q	R	S mm	T	U	V	W Ø / depth	X	Y mm	Z		
HD 319	0.73	1.30	3.19	5.98	AF 24	5.83	0.31	3.15	³	0.94	□ 1.18	3.86		
HD 419	0.73	1.30	3.19	5.98	AF 24	5.83	0.31	3.15	³	0.94	□ 1.18	3.86		
HD 619	0.73	1.30	3.19	5.98	AF 24	5.83	0.31	3.15	³	0.94	□ 1.18	3.86		


² 1/2-13 UNG-2B / 0.78

³ W_{Flange} = 1/2-13 UNC-2B, W_{Thread} = 7/16-14 UNC-2B, depth = 0.71

Symbols

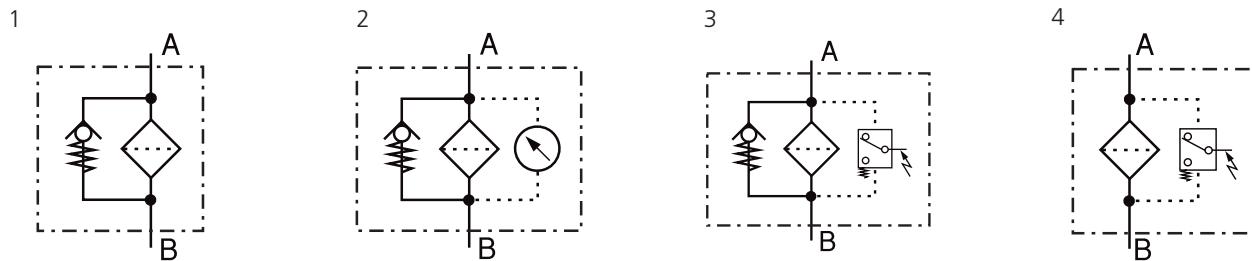

Spare Parts

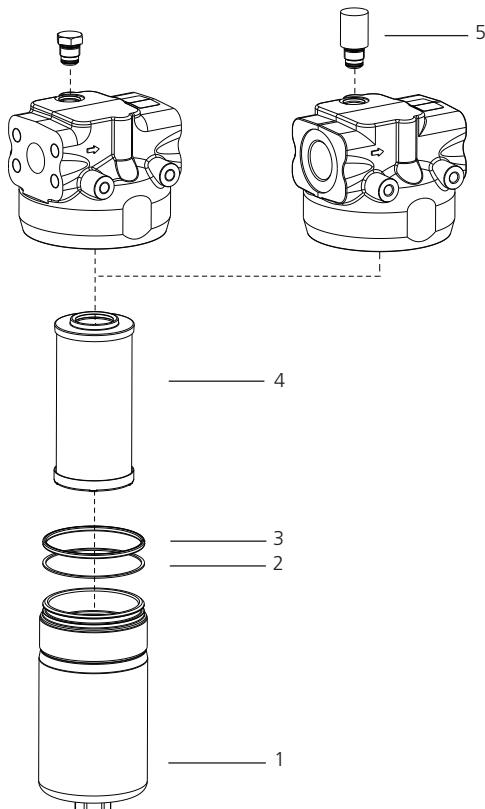

Pos.	Designation	Part No.
1	Filter bowl HD 319 (with Pos. 2 und 3)	HD 250.0701
1	Filter bowl HD 419 (with Pos. 2 und 3)	HD 451.0702
1	Filter bowl HD 619 (with Pos. 2 und 3)	HD 619.0701
2	Back-ring	HD 255.0102
3	O-ring 94.84 x 3.53 mm 3.73 x 0.14 inch	N007.0953
4	Replacement filter element	see Chart / col. 9
5	Clogging indicator	see catalog sheet 60.40

The functions of the complete filters as well as the outstanding features of the filter elements assured by ARGO-HYTOS can only be guaranteed if original ARGO-HYTOS spare parts are used.

Quality Assurance

Quality management according to DIN EN ISO 9001

To ensure constant quality in production and operation, ARGO-HYTOS filter elements undergo strict controls and tests according to the following ISO standards:

- ISO 2941 Verification of collapse / burst pressure rating
- ISO 2942 Verification of fabrication integrity (Bubble Point Test)
- ISO 2943 Verification of material compatibility with fluids
- ISO 3968 Evaluation of pressure drop versus flow characteristics
- ISO 16889 Multi-Pass-Test (evaluation of filter fineness and dirt-holding capacity)
- ISO 23181 Determination of resistance to flow fatigue using high viscosity fluid

Before release into the series production the filter casing is tested for fatigue strength in our pressure pulse test rig. Various quality controls during the production process guarantee the leakfree function and solidity of our filters.

Illustrations may sometimes differ from the original. ARGO-HYTOS is not responsible for any unintentional mistake in this specification sheet.