



CETOP 4.2-4 P05-320 STANDARD PATTERN

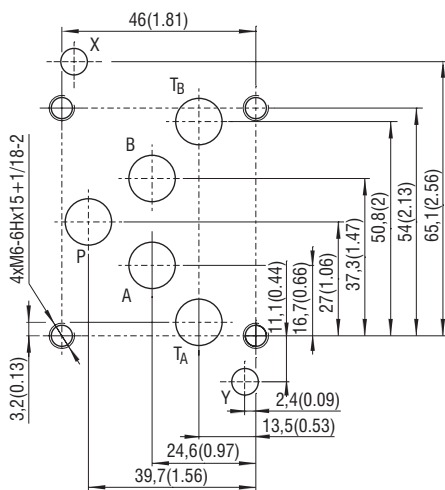

Ports P, A, B, T - max. - Ø11.2 mm (0.44 in)  
Ports X, Y - max. - Ø6.3 mm (0.25 in)

ISO 4401-05-05-0-05 CETOP 4.2-4 R05-320

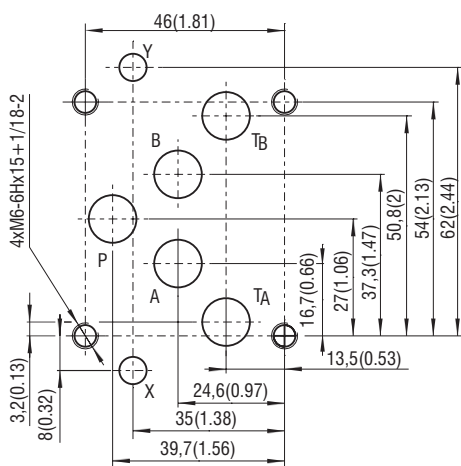

Ports P, A, B, T - max. - Ø11.2 mm (0.44 in)  
Ports X, Y - max. - Ø6.3 mm (0.25 in)

**Operating limits**

Operating limits for maximum hydraulic power at rated temperature and supplied with voltage equal to 90 % of the nominal value

Maximum flow rates in l/min (GPM)	at pressure	
	210 bar (3050 PSI)	320 bar (4640 PSI)
Spool type C11	120 (32)	100 (26)
All other spools	150 (40)	120 (32)

**Technical Features**

- › Directional control valve internally or externally pilot operated with standard mounting interface CETOP 4.2-4 P05-320, optional interface acc. to ISO 4401-05-05-0-05
- › Driven by an ISO 4401-03 (CETOP 03) solenoid operated directional valve (RNEH) or a hydraulic pilot operated directional valve (RNH)
- › Hydraulic control ports X and Y
- › High transmitted hydraulic power up to 320 bar with optimized design to minimize pressure drop
- › Version for high pressures (420 bar) available
- › High transmitted hydraulic power, optimized design to minimize the pressure drop
- › Flexibly changed from internal pilot or drain to external by inserting or removing threaded plugs in the main control valve body
- › Wide range of interchangeable spools and valve controls available. Soft-shift, spool speed, main stroke limiter control options
- › In the standard version, the valve housing is phosphated for basic surface corrosion protection and as preparation for painting. Steel parts are zinc-coated for 240 h salt spray protection acc. to ISO 9227. Enhanced surface protection for mobile sector available for the valve housing and steel parts (ISO 9227, 520 h salt spray).


**Technical Data**

Valve type		RN*1-10	RN*1H-10
Valve size		10 (D05)	
Max. flow		150 (37)	
Max. operating pressure at port P, A, B		320 (4640)	420 (6090)
- at port T (external drain)		210 (3050)	350 (5080)
- at port T (internal drain)		210 (3050)	
Minimum pilot pressure		12 (174)	
Maximum pilot pressure		210 (3050)*	350 (5080)*
Fluid temperature range (NBR)		-30 ... +80 (-22 ... +176)	
Fluid temperature range (FPM)		-20 ... +80 (-4 ... +176)	
Ambient temperature range		-30 ... +50 (-22 ... +122)	
Supply voltage tolerance		AC: ±10	DC: ±10
Max. switching frequency		1/h	
Enclosure type acc.to EN 60529		IP 65	
Switching time at v=32 mm <sup>2</sup> /s (156 SUS)		ON	ms
		OFF	ms
Weight		RNH1-10	4,6 (10.1)
		RNEH1-102	6,4 (14.1)
		RNEH1-103	7 (15.4)
Datasheet		Type	
General information		GI_0060	products and operating conditions
Mounting interface		SMT_0019	Size 10
Spare parts		SP_8010	

\*For higher system pressure use option „Z“

**Characteristics** measured at v = 32 mm<sup>2</sup>/s (156 SUS)

**Pressure drop related to flow rate**

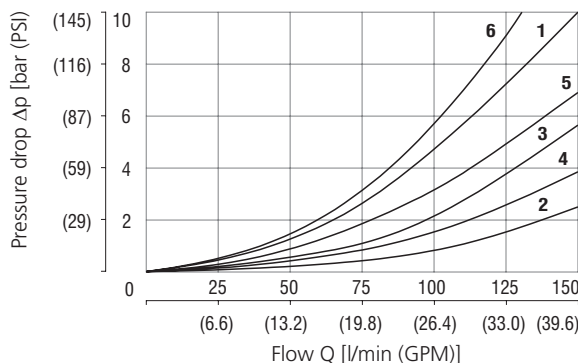

	Spool position	P-A	P-B	A-T	B-T	P-T		Spool position	P-A	P-B	A-T	B-T	P-T
Z11	Energized	1	1	2	3		J17, J27	Energized	1	1	4	3	
H11	De-energized					6*	R51, R52, X51, X52	De-energized	1			3	
	Energized	5	5	2	4			Energized		1	4		
Y11	De-energized			1**	1***		P11	De-energized					6***
	Energized	1	1	2	4			Energized	6	6	3	5	
C11	De-energized					6							
	Energized	6	6	3	5								

\*A-B blocked \*\*B blocked \*\*\*A blocked

**Ordering Code**

<p><b>4/2 and 4/3 directional control valve, internally and externally pilot operated</b></p> <p><b>Type of control</b> electrohydraulically operated <b>EH</b> hydraulically operated <b>H</b></p> <p><b>Design series</b> standard 320 bar <b>1</b> high pressure 420 bar <b>1H</b> (not available for C11 spools)</p> <p><b>Valve size and connecting pattern</b> Standard pattern <b>10</b> Pattern ISO 4401-05-05-05 <b>10R</b></p> <p><b>Number of spool positions</b> two positions <b>2</b> three positions <b>3</b></p> <p><b>Spool symbols</b> see the table spool symbols</p> <p><b>Control Options</b> without additional features <b>No designation</b> main spool stroke limiter <b>C</b> main spool shifting speed control <b>D</b> shifting speed control, with orifice (0.8 mm) in port P of solenoid pilot valve <b>PF</b></p> <p><b>Piloting</b> internal <b>No designation</b> not available for spools 3H11, 3C11, 2R52, 2X52, 2J27 internal with installed pressure reducing valve, fixed 30 bar setting <b>Z</b> external <b>E</b></p>		<p><b>Surface treatment</b> <b>No designation</b> phosphated body, steel parts for 240h salt spray test (ISO 9227) <b>B</b> 520 h salt spray test (ISO 9227)</p> <p><b>Seals</b> <b>No designation</b> NBR <b>V</b> FPM (Viton)</p> <p><b>Manual override (only for RNEH)</b> <b>No designation</b> Standard <b>N1</b> protected with retaining nut <b>N2</b> protected with rubber boot</p> <p><b>Solenoid electrical terminals</b> <b>E1</b> EN 175301-803-A <b>E2</b> E1 with quenching diode <b>E5</b> EN 175301-803-A with integrated rectifier</p> <p><b>Rated supply voltage of solenoids</b> (at the coil terminal) <b>01200</b> 12 V DC / 2,72 A <b>02400</b> 24 V DC / 1,29 A <b>12060</b> 120 V AC / 0,35 A / 50 (60) Hz <b>23050</b> 230 V AC / 0,17 A / 50 (60) Hz</p> <p>see datasheet RPE3-06 (4010) for other pilot valve options</p> <p><b>Drain</b> <b>No designation</b> external <b>I</b> internal</p>	
---	--	--	--

**Installation note:**

- Piloting must always be external for all types RNH and for types RNEH with spools H11, C11, R52, X52, J27.
- For directional valves with two solenoids, one solenoid must be without supply voltage charge before the other solenoid can be charged.
- The AC coils correspond to E5 Solenoid electrical terminal.
- Other voltage of solenoids see datasheet HA 8007
- The solenoid operated valves are delivered without connectors.
- Connectors are not supplied. For connector versions see datasheet HA 8008.
- Configurations with centering and recall springs can be mounted in any position; type J17, J27 valves - without springs and with mechanical retention must be mounted with the longitudinal axis horizontal.
- Other special versions are available. Consult our technical department.


**Spool Symbols**

Three positions with centering spring		Two positions with return spring			
Z11		R51			
H11		R52			
Y11		X51			
C11		X52			
P11		<b>Two positions with mechanical detent on pilot valve</b>			
<p>Symbols are referred to the solenoid valve RNEH. For the hydraulic control version RNH please see the connection schematic (see page 3)</p>				J17	
				J27	

**Pilot and Drain**

The RNEH valves are available with pilot and drain, both internal and external. The version with external drain allows for a higher back pressure on the outlet.

Type of valve		Plug assembly	
		X	Y
RNEH1-10**/*	internal pilot and external drain	NO	YES
RNEH1-10**/*I	internal pilot and internal drain	NO	NO
RNEH1-10**/*E	external pilot and external drain	YES	YES
RNEH1-10**/*EI	external pilot and internal drain	YES	NO

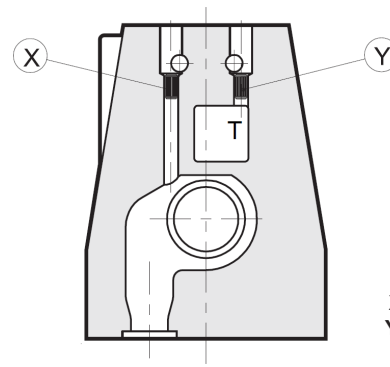

**X:** plug M5x6 for external pilot  
**Y:** plug M5x6 for external drain

**Electrical Features**

**Solenoids**


The operating solenoids are DC solenoids. For AC supply, the solenoids are provided with a rectifier integrated in the DIN connector socket as part of the solenoid. The connectors can be turned by 90°. By loosening the nut, the solenoids can be turned or replaced without interfering with any of the valve seals. In case of a solenoid malfunction or power failure, the spool of the valve can be shifted by manual override, provided the pressure in port T does not exceed 25 bar.

For detailed information on the pilot valve RPE3-06 refer to datasheet No. 4010.

**Actuation** in millimeters (inches)


**Solenoid control: RNEH**

The valve is supplied with an RPE3-06 pilot solenoid valve.

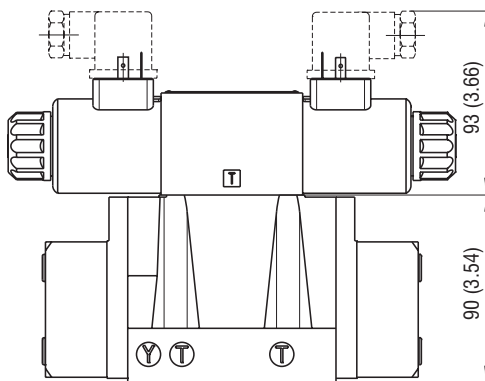

**Hydraulic control: RNH**

The valve is supplied with a cross-connection cover plate. X and Y connections are used for the hydraulic control of the valve.

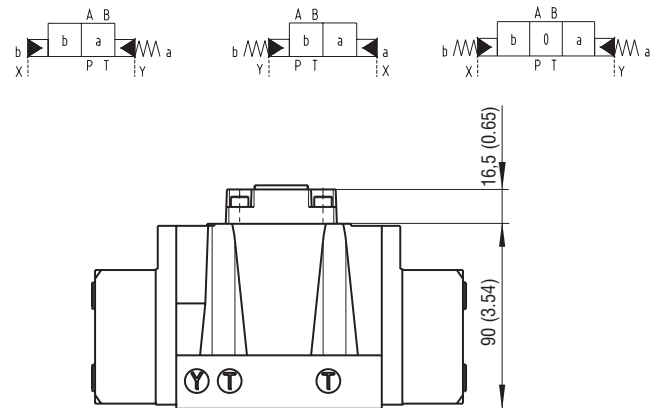

The minimum piloting pressure can be as low as 5 bar at low flow rates, but with higher flow rates a pressure of 12 bar is needed.

If the valve operates with higher pressures it is necessary to use the version with external pilot and reduced pilot pressure. Otherwise, the valve with internal pilot and a pressure reducing valve with a 30 bar fixed setting can be ordered.

**Control Options - Special Features**

**Control of the main spool shifting speed: D**

By placing a 2VS3-06 flow control valve between the pilot solenoid valve and the hydropiloted valve, the pilot flow rate can be controlled and therefore the shifting speed adjusted. Add the letter **D** to the identification code to request this device.

**Pilot pressure reducing valve - 30 bar fixed setting: Z**



Internal piloting with mounted pressure reducing valve with 30 bar fixed setting. The option **Z** may be used together with option **D**.

**Control of the main spool stroke: C**

Using special side plugs, it is possible to introduce stroke control the piloted valve so as to vary the maximum spool opening clearance. This solution allows the control of the flow rate from the pump to the actuator and from the actuator to the outlet, resulting in double adjustable control of the actuator. Add the letter **C** to the identification code to request this device.

**Shifting speed control: PF**

with an orifice (0,8 mm) in port P of the solenoid pilot valve  
Add **PF** to the identification code to request this device



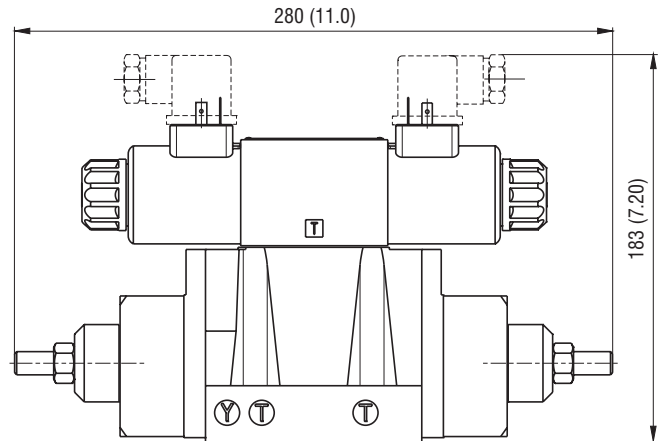
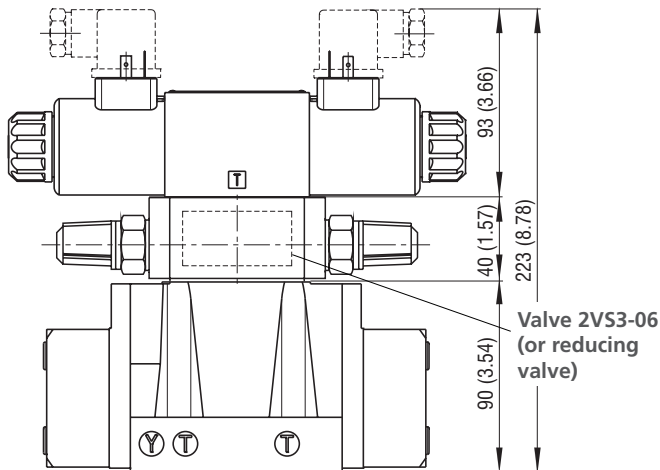


**Solenoid operated distributor with pilot valve in the configuration 3H11**

It is possible to deliver the solenoid operated distributor with the pilot valve in configuration 3H11 (all the ports at the outlet). This configuration is used with external piloting in order to allow the unloading of the piloting line when the solenoid operated valve is in the rest position. With this option, the piloting is necessarily external.

**Dimensions** in millimeters (inches)

**RNEH1-102, RNEH1-103**

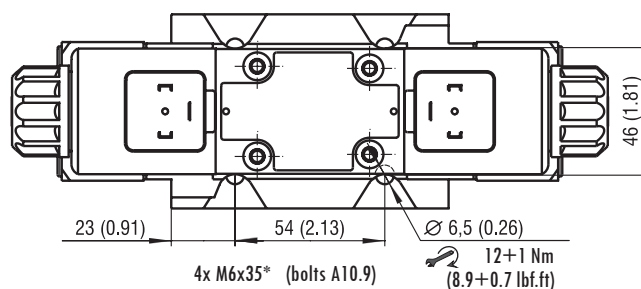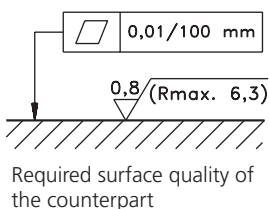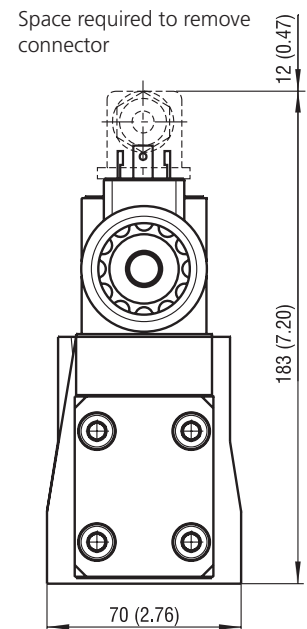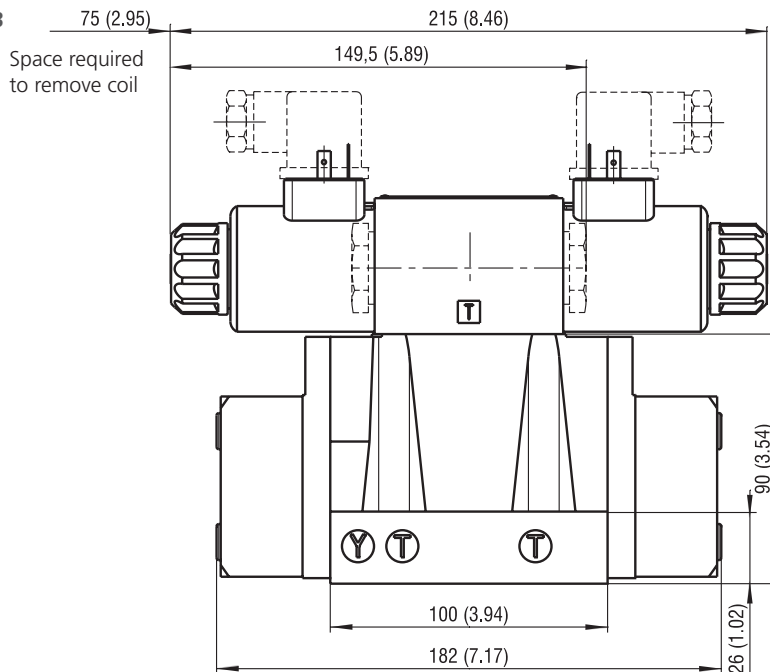

mounting hole threads: M6x10

\*bolts not supplied