

### Technical Features

- › Hydraulic safety relief valve suitable for use as a safety device in Category IV Group 2 applications acc.to European Commission (EC) Pressure Equipment Directive (PED) 2014/68/EU
- › CE marked valves are supplied with "Declaration of Conformity", "Operating Instructions" and the list of residual risks  
Always follow the operating instructions supplied with the valve!
- › Wide pressure range up to 350 bar
- › Hardened precision parts
- › Sharp-edged steel seats for dirt-tolerant performance
- › Leak-free closing and suitable for fast cycling with long life
- › Adjustable by allen key or hand screw
- › In the standard version, the valve is zinc-coated for 1000 h protection acc. to ISO 9227)


### Functional Description

A poppet type, direct acting hydraulic relief valve in the form of a screw-in cartridge intended for use as a pressure limiting device for common hydraulic circuit protection. The spring acts on the poppet and presses it onto the valve seat. If the hydraulic pressure is below the pre-set value, the valve is closed. If the hydraulic force exceeds the pre-set value the valve opens and flow passes to tank port until the system pressure falls below the spring pre-set value and the valve closes back again.

### Technical Data


Valve size / Cartridge cavity		3/4-16 UNF-2A / A2 (C-8-2)	
Max. flow	l/min (GPM)	30 (7.9)	
Max. operating pressure	bar (PSI)	350 (5080)	
Max. pressure (T port)	bar (PSI)	160 (2320)	
Fluid temperature range (NBR)	°C (°F)	-30 ... +100 (-22 ... 212)	
Fluid temperature range (FPM)	°C (°F)	-20 ... +120 (-4 ... 248)	
Max. leakage of closed valve at 80% cracking pressure	cm <sup>3</sup> /min	0.1	
Viscosity range	mm <sup>2</sup> /s (SUS)	10 ... 500 (49 ... 2450)	
Weight	kg (lbs)	0.13 (0.29)	
		Datasheet	Type
General information		GI_0060	Products operating conditions
Valve bodies	In-line mounted	SB_0018	SB-A2*
	Sandwich mounted	SB-04(06)_0028	SB-*A2*
Cavity details / Form tools		SMT_0019	SMT-A2*
Spare parts		SP_8010	

#### Symbol



### Characteristics measured at v = 32 mm<sup>2</sup>/s (156 SUS)

#### Relief pressure related to flow rate

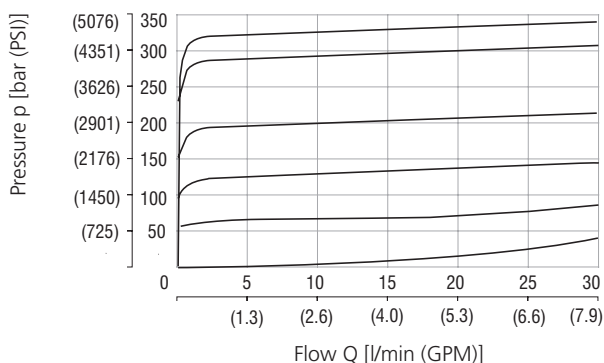

	Pressure range
6	35
5	25
4	16
3	10
2	6
1	Min. pressure setting

### Valves Adjusted by the Manufacturer

- › The valves are adjusted for the specified pressure at the relevant flow rate and they are fitted with tamper-indicating seals
- › The pressure and flow rate values are indicated in the valve description on the product [pressure in bar, flow rate in l/min]
- › The seals bear the company logo

## Valves NOT Adjusted by the Manufacturer

- › Valves have no tamper-indicating seals
- › No pressure and no flow rate indicated - SR1A-B2/HxxL-CE1017
- › After the completion of the functional test, the adjusting screw is completely loosened and the pressure is set to  $p = 0$  bar
- › To adjust the required valve pressure proceed as follows:
  - turn the adjusting screw to the right (clockwise) to increase the pressure
  - turn the adjusting screw to the left (counter-clockwise) to decrease the pressure
- › The manufacturer accepts no responsibility for the adjustment, securing, and sealing of the valve

## Residual Risks


Residual risks are listed and preventive measures against the occurrence of residual risk are described in the document „Operating instructions for pressure relief valve SR1A-A2/LxxL-CE1017“ which is delivered with each valve.

## Application area

The diagram shows the operating region where the valve meets the requirements of Directive 2014/68/EU and Standard ISO 4126-1 on maximum short-time overshoot of system pressure by 10 % above the set cracking pressure when the valve opens.


The dynamics of the valve depend on the kinematic viscosity of working fluid.

Measurement conditions: oil Renolin VG 32,  $T = 40$  °C (104 °F),  $V = 0.5$  l (0.132 gal US)

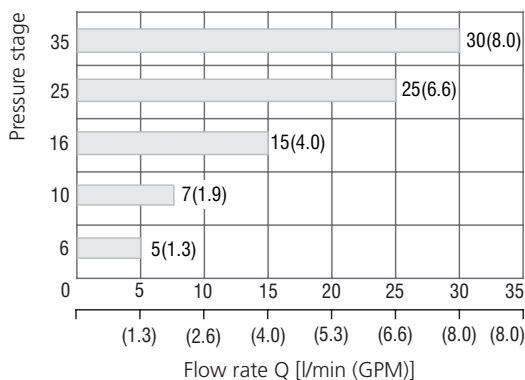

Application area characteristics from certification of SR1A-A2/LxxL-CE1017\*

## Dimensions in millimeters (in)

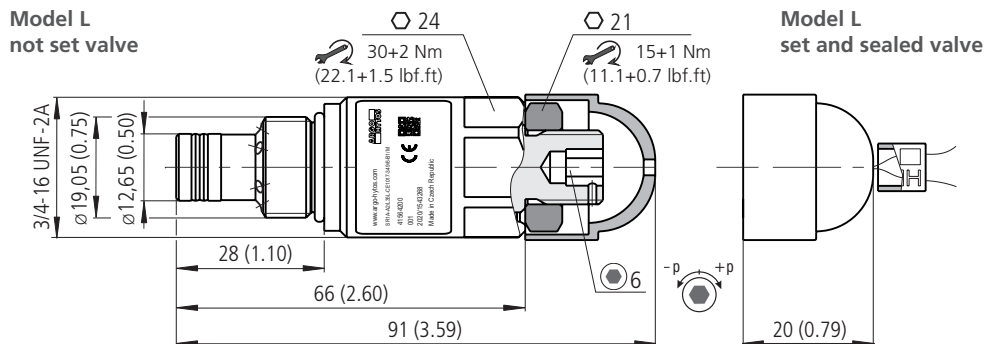

## Ordering Code

<p><b>Pressure relief valve, PED certified, poppet type, direct acting</b></p> <p><b>Valve cavity</b> 3/4-16 UNF (C-8-2)</p> <p><b>Model</b> Lightline</p> <p><b>Pressure range</b></p> <table border="0"> <tr><td>adjustable pressure 63 bar (910 PSI)</td><td><b>6</b></td></tr> <tr><td>adjustable pressure 100 bar (1450 PSI)</td><td><b>10</b></td></tr> <tr><td>adjustable pressure 160 bar (2320 PSI)</td><td><b>16</b></td></tr> <tr><td>adjustable pressure 250 bar (3630 PSI)</td><td><b>25</b></td></tr> <tr><td>adjustable pressure 350 bar (5080 PSI)</td><td><b>35</b></td></tr> </table>	adjustable pressure 63 bar (910 PSI)	<b>6</b>	adjustable pressure 100 bar (1450 PSI)	<b>10</b>	adjustable pressure 160 bar (2320 PSI)	<b>16</b>	adjustable pressure 250 bar (3630 PSI)	<b>25</b>	adjustable pressure 350 bar (5080 PSI)	<b>35</b>	<p><b>SR1A-A2 / L</b> [ ] <b>L</b> [ ] <b>- CE1017 -</b> [ ] <b>/</b> [ ] <b>- B1</b></p>	<p><b>Surface treatment</b> zinc-coated (ZnNi), ISO 9227 (1000 h)</p> <p><b>Pressure setting at flow rate [l/min]*</b> Std. pressure setting made at flow 6 litres/min (example) <b>6</b></p> <p><b>Adjusted pressure [bar]*</b> (example) <b>120</b></p> <p><b>Certification PED</b> notified body number CE1017</p> <p><b>Seals</b> NBR FPM (Viton)</p> <p><b>Adjustment option</b> allen head (hex. 6), with protective cap, sealable (lockwire holes)</p>
adjustable pressure 63 bar (910 PSI)	<b>6</b>											
adjustable pressure 100 bar (1450 PSI)	<b>10</b>											
adjustable pressure 160 bar (2320 PSI)	<b>16</b>											
adjustable pressure 250 bar (3630 PSI)	<b>25</b>											
adjustable pressure 350 bar (5080 PSI)	<b>35</b>											

\*If not preset valves are ordered, pressure and flow rate information is not shown.