


**ST21A-B2**

7/8-14 UNF •  $Q_{max}$  140 l/min (37 GPM) •  $p_{max}$  350 bar (5100 PSI)

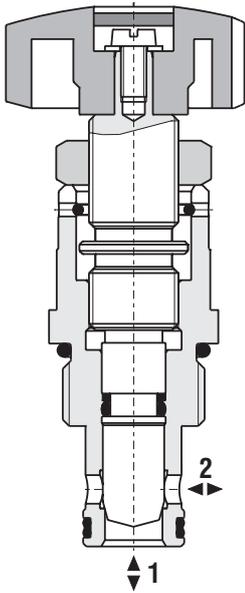

**Technical Features**

- › Hardened precision parts
- › Fine low-torque adjustment
- › Linear adjustment and positive seat overlap
- › Optionally adjustable by hand screw
- › Desired settings may be locked down
- › In the standard version, the valve is zinc-coated for 240 h protection acc. to ISO 9227. Enhanced surface protection for mobile sector available for the steel parts (ISO 9227, 520 h salt spray)

**Functional Description**

A hydraulic flow restrictor valve in the form of a screw-in cartridge. The valve restricts flow in both directions, making it ideal for fine control of an uncompensated system or for use as a shut-off valve.

Model Code	ST21A-B2
Symbol	

**Technical Data**


Valve size / Cartridge cavity		7/8-14 UNF-2A / B2 (C-10-2)
Max. flow	l/min (GPM)	140 (37)
Max. operating pressure	bar (PSI)	350 (5076)
Fluid temperature range (NBR)	°C (°F)	-30 ... +100 (-22 ... +212)
Weight	kg (lbs)	0.3 (0.66)

	Datasheet	Type
General information	GI_0060	Products and operating conditions
Valve bodies	In-line mounted	SB-0018
	Sandwich mounted	SB-04(06)_0028
Cavity details / Form tools	SMT_0019	SMT-B2*
Spare parts	SP_8010	

**Characteristics** measured at  $v = 32 \text{ mm}^2/\text{s}$  (156 SUS)

**Pressure drop related to flow rate**


Flow direction 1 - 2

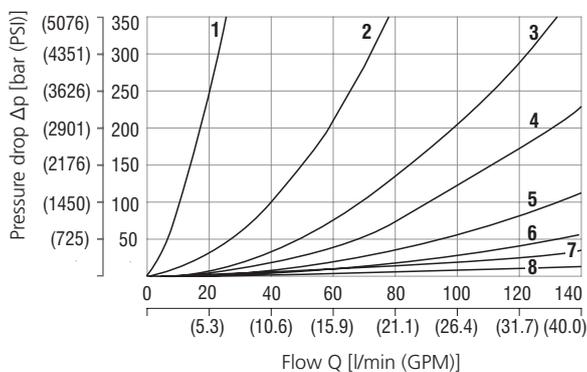

Number of half turns (180°) of the adjust. screw							
1	2	3	4	5	6	7	8

**Pressure drop related to flow rate**


Flow direction 2 - 1

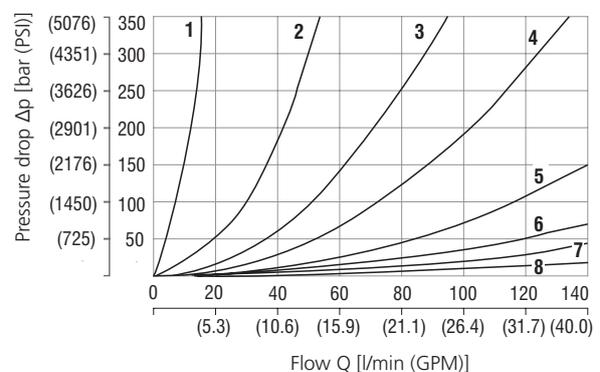

Number of half turns (180°) of the adjust. screw							
1	2	3	4	5	6	7	8

**Dimensions** in millimeters (inches)

**Model S**

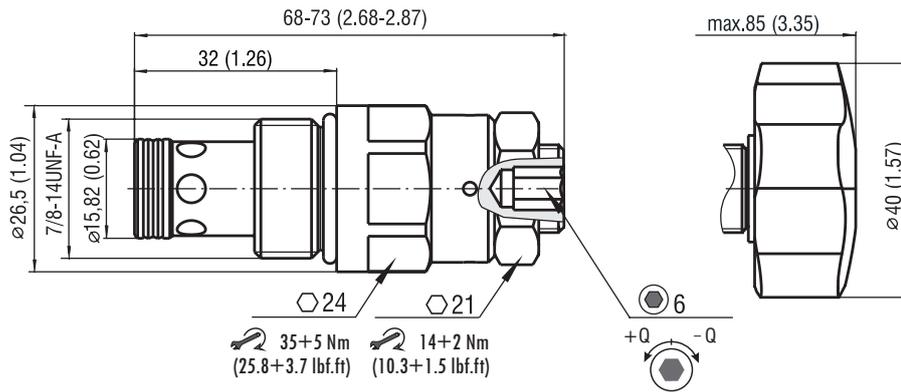

**Model RP**

**Ordering Code**

