

- For in-line mounting of hydraulic valves
- Parallel connection of ports P and T
- 1 ... 6 sections possible
- Stud bolts for vertical stacking assemblies - see data sheet HA 0020
- Installation dimensions size 04 to ISO 4401 CETOP - RP 121H



Ordering Code


PD04A - AL

In-line connecting plate

Material - aluminium

Nominal size

Connection
Functional symbol



1
2
3
4
5
6

Number of sections

1 section
2 sections
3 sections
4 sections
5 sections
6 sections


Survey of types

Type	Ordering number	Weight
PD04A1-AL	16105700	0,60 kg
PD04A2-AL	16105800	1,22 kg
PD04A3-AL	16105900	1,76 kg
PD04A4-AL	16106100	2,30 kg
PD04A5-AL	16106300	2,86 kg
PD04A6-AL	16106500	3,40 kg

Valve Dimensions

Dimensions in inches and millimeters (in brackets)

Plates with 1 section

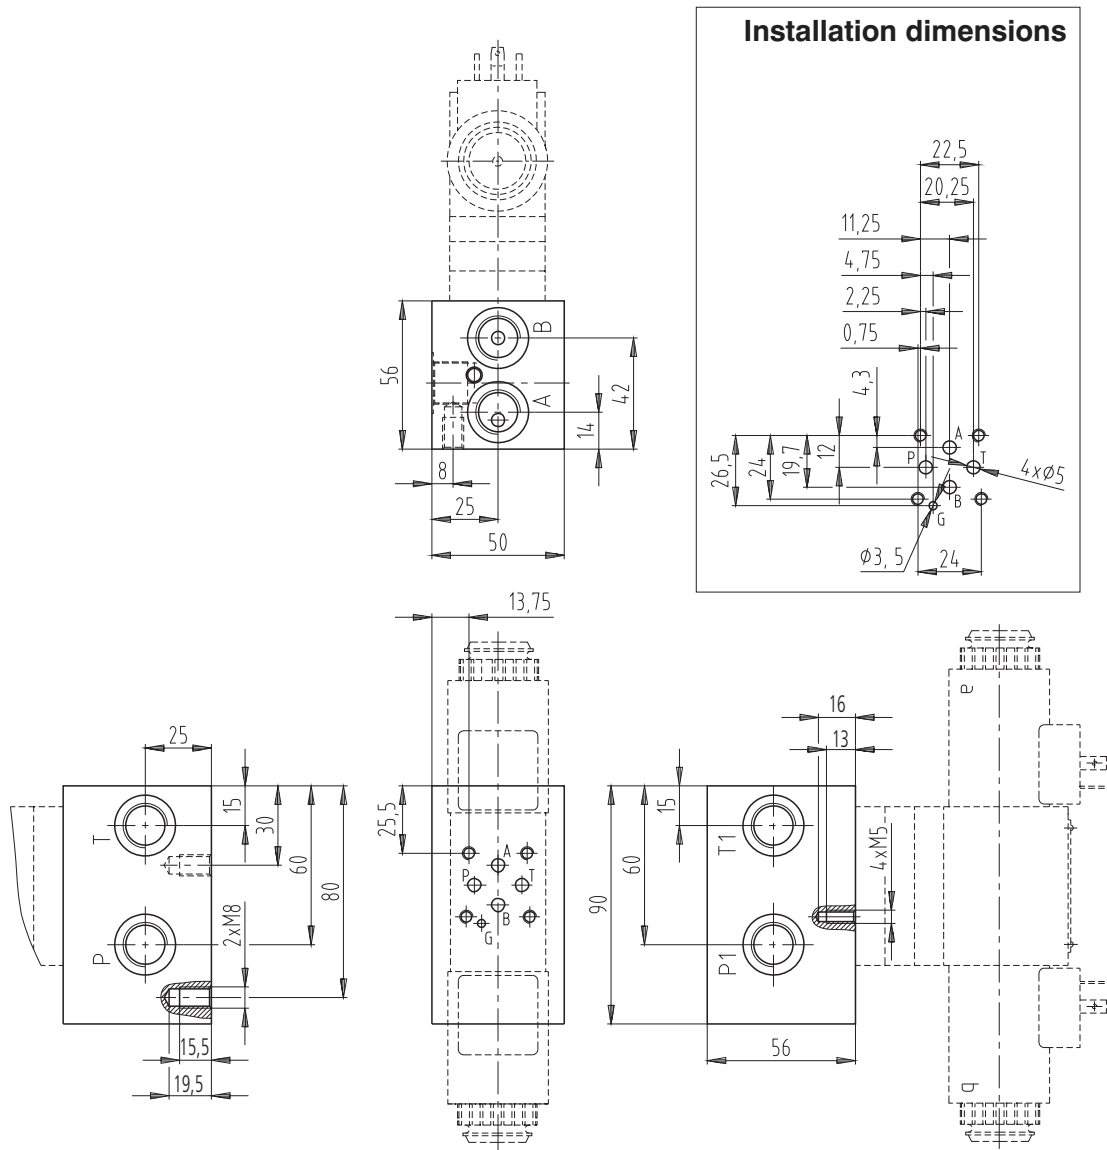


Port	A	B	T	P	T1	P1
Thread	G3/8	G3/8	G3/8	G3/8	G3/8	G3/8
Depth of thread	12	12	12	12	12	12
Counterbore	Ø23	Ø23	Ø23	Ø23	Ø23	Ø23
Depth of counterbore	1	1	1	1	1	1

Valve Dimensions

Dimensions in inches and millimeters (in brackets)

Plates with 2 ... 6 sections

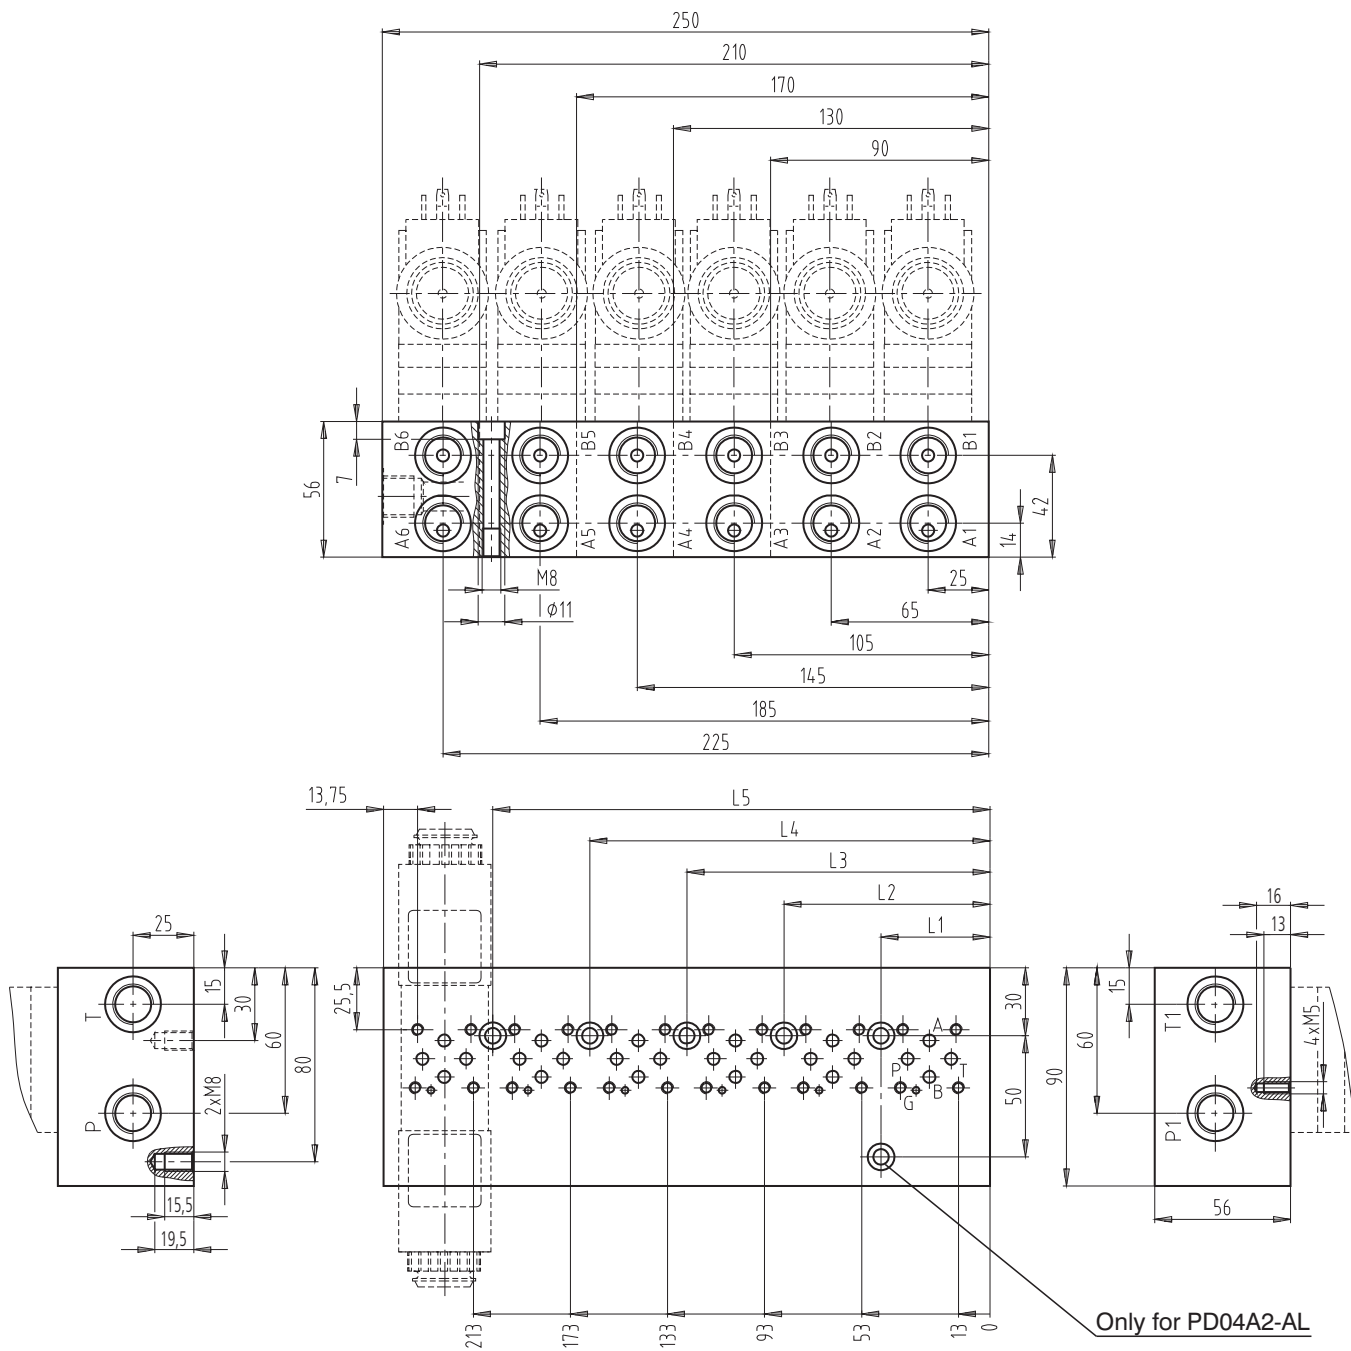

Port	A1 - A6	B1 - B6	T	P	T1	P1
Thread	G3/8	G3/8	G3/8	G3/8	G3/8	G3/8
Depth of thread	12	12	12	12	12	12
Counterbore	Ø23	Ø23	Ø23	Ø23	Ø23	Ø23
Depth of counterbore	1	1	1	1	1	1
Typ		L1	L2	L3	L4	L5
PD04A2-AL		45	-	-	-	-
PD04A3-AL		45	85	-	-	-
PD04A4-AL		45	-	125	-	-
PD04A5-AL		45	-	-	165	-
PD04A6-AL		45	-	125	-	205

Caution!

- The packing foil is recyclable.
- The technical information regarding the product presented in this catalogue is for descriptive purposes only. It should not be construed in any case as a guaranteed representation of the product properties in the sense of the law.

ARGO-HYTOS s.r.o. CZ - 543 15 Vrchlabí
Tel.: +420-499-403 111
E-mail: info.cz@argo-hytos.com
www.argo-hytos.com